

PIN	1	2	3	4	5	6	7	8	9	10	11	12
COM1	COM1				1F	1A	2F	2A	3F	3A	4F	4A
COM2		COM2			1G	1B	2G	2B	3G	3B	4G	4B
COM3			COM3		1E	1C	2E	2C	3E	3C	4E	4C
COM4				COM4	P1	1D	P2	2D	P3	3D	P4	4D


VIEWING DIRECTION →

大连佳显电子有限公司
DALIAN GOOD DISPLAY CO., LTD

DESIGNED BY: L.M.L	GDC04212	VERSION: 2.0
CHECKED BY:		NO. 1 OF 3
		UNIT: mm
		DATE: 2015-06-11

- NOTES:
1. DISPLAY TYPE: TN
 2. LCD OPERATING VOLTAGE: 3.0V
 3. OPERATING TEMPERATURE: -40°C~80°C
 4. STORAGE TEMPERATURE: -45°C~85°C
 5. DRIVE MODE: 1/4D, 1/3B
 6. VIEWING DIRECTION: 6:00
 7. POLARIZER TYPE: TRANSLUCTIVE, POSITIVE
 8. CONNECTOR: PIN
 9. CUSTOMER NO: ---
 10. Unspecified tolerance is ±0.2mm
 11. LCM NO: ---

reason

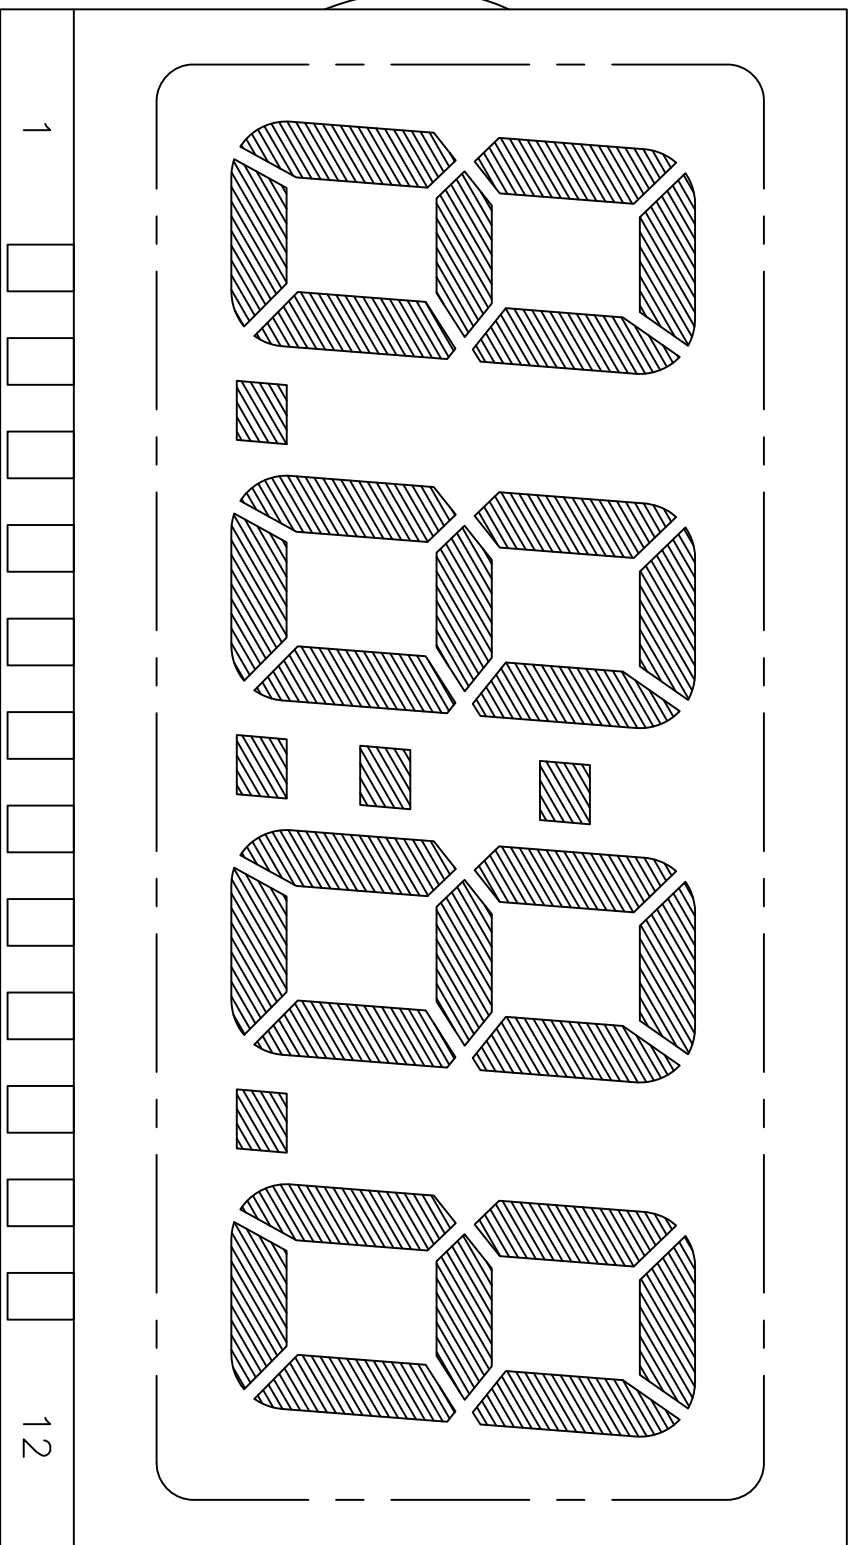

大连佳显电子有限公司

DALIAN GOOD DISPLAY CO., LTD

DESIGNED BY:


LML

GDC04212

VERSION: 2.0

NO. 2 OF 3

CHECKED BY:




UNIT: mm

DATE: 2015-06-11


全显示效果图

reason

SEG

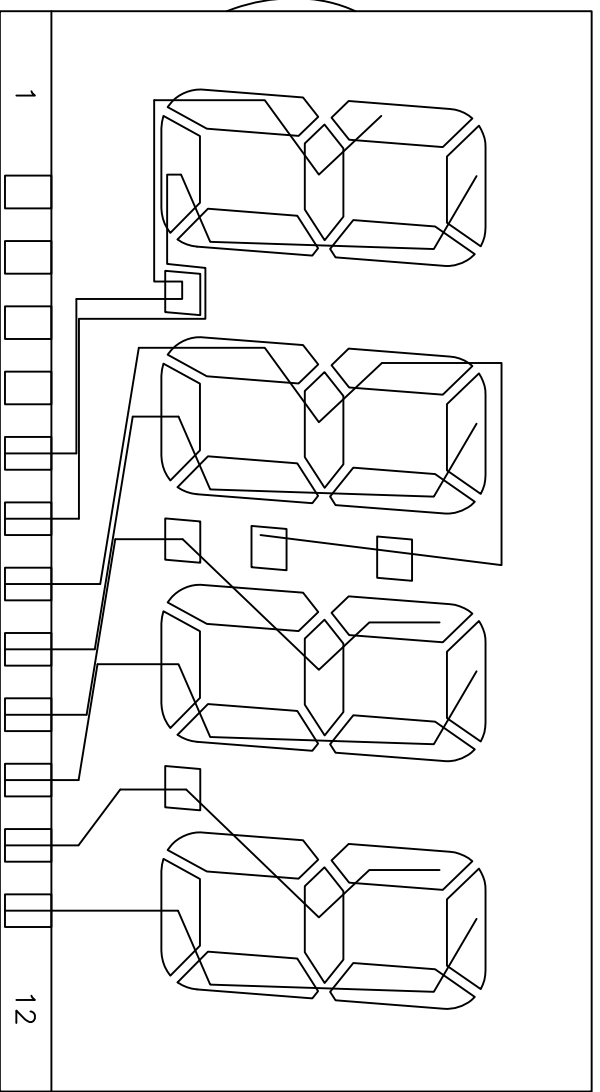

COM

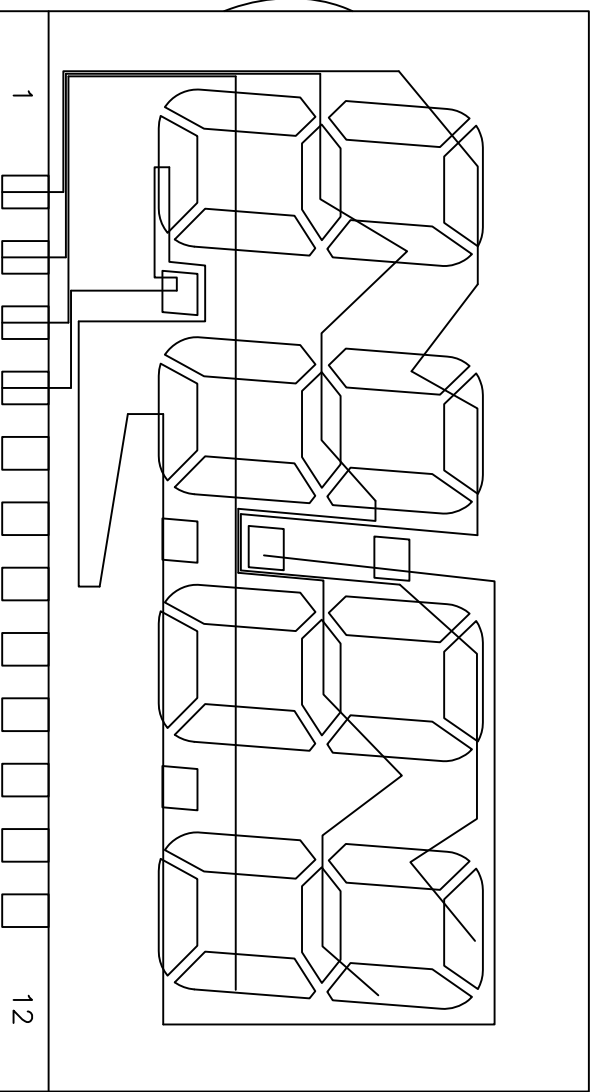

大连佳显电子有限公司
DALIAN GOOD DISPLAY CO., LTD

DESIGNED BY:


L,ML

GDC04212

VERSION: 2.0

NO. 3 OF 3

CHECKED BY:



UNIT: mm

DATE: 2015-06-11